


LINEAR HEAT SENSOR



FEATURES

- FM Approved, c(UL)us and CE Approved
- Provides 2-dimensional detection
- Chemical Resistant Outer Jacket
- LHS Base provides installing LHS at any point in a mixed-detection circuit
- 100-meter spool
- Replace if in fire event

Where Used	SA1	NET	
	✓	✓	

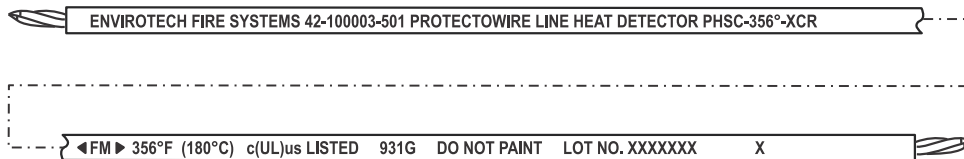

42-100003-501 Envirotech LHS Cable Lay Line

Technical Information

Item	Specification
Operating Temperature	-40°F (-40°C) to 250°F (121°C)
Nominal Alarm	356°F (180°C)
Outer Jacket Color	Green
Outer Jacket Material	Fluoropolymer

PRODUCT INFORMATION

LHS Cable, 100 Meters Reel (328 Feet), 356° F	42-100003-501	EFS-42-2222	Where Used	SA1	NET	
Base, LHS Cable	83-132454-000	EFS-42-2221		✓	✓	

RELATED PRODUCT INFORMATION

Detection Cable (Sentinel)	83-132482-xxx	EFS-42-2330	Where Used	SA1	NET	
SA1 Control Panel Assembly (ships without power supply)	83-132400-000	EFS-42-2110	Where Used	✓	✗	
Network Control Module, Sentinel NET	83-132420-000	EFS-42-2120	Where Used	✗	✓	

This literature is provided for informational purposes only. Envirotech Fire Systems, Inc. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. Envirotech Fire Systems, Inc. believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. If you need more information on this product, or if you have a particular problem or question, contact Envirotech Fire Systems, Inc. Systems shall be deployed according to applicable Design, Installation, Operation and Maintenance Manual.